


Циклон абразивоустойчивый



80°

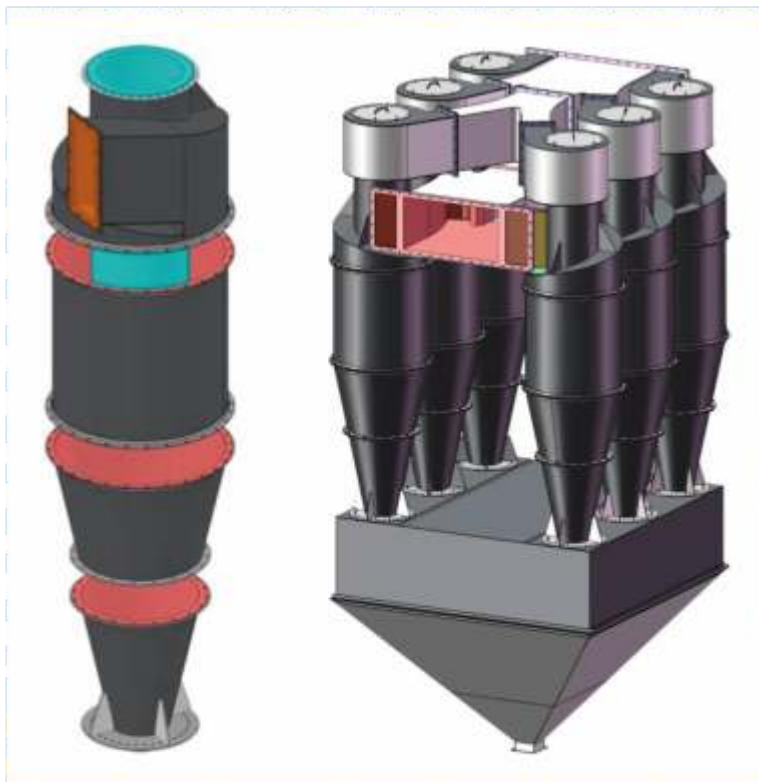

[www.ive-co.ru](http://www.ive-co.ru)

!



	0	1300
	0	120
	%	10



	/	380/50
		1,5
( )	/	50
	<sup>3</sup> /	1270
		400 550
		1000
, L B H		810 940 2750
		190



( )

	3	0,0132
	0	250
		780...880 575 320
		50-56



.. .),

( , , , , )

-50° +50° .

(  
);

;

;

;

;

		-1	-2	-3
2	/	1		
3	51251	G1	U17	
	.	1	2	3
	.	4	8	12
( ) / .	. <sup>3/</sup>	2,5-9	5-18	7,5-27
II , -	<sup>3/</sup> 2	1,5		



3-6 ;

	<sup>3</sup> /	2000 - 350 000
	/ <sup>3</sup>	50 - 200
	/ <sup>3</sup>	5-3
	<sup>0</sup>	260
/		6500
( )		800 - 1600
: - 135		1300; 2550; 3650; 4900; 6000
:		3-6

- 2000 - 350000 <sup>3</sup>/ ;
- 800 - 1600 ;
- / 6500 ;
- -40 - +260<sup>0</sup> ;
- 200 / <sup>3</sup>.



«  
»  
21  
472 500 <sup>3</sup>/

« - »



250°




	0	600
	0	250

[www.ive-co.ru](http://www.ive-co.ru)

!



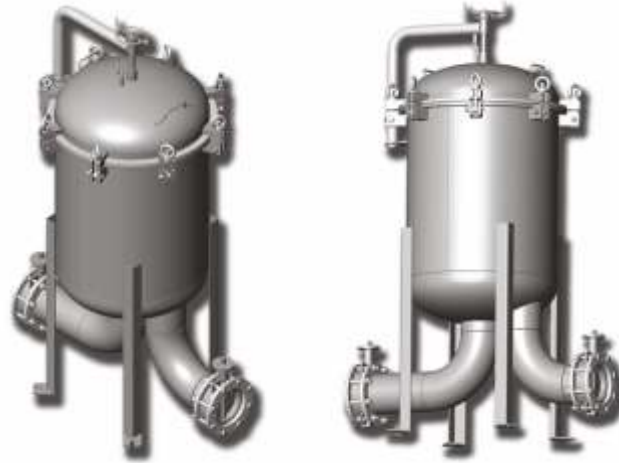

( ) « » ( )

« »

« » ;

« »


-50	1670 720 720	50	1	6/10	10 1000	20	
-65	2080 950 920	65	2	6/10		35	
-80	2220 1000 970	80	3	6/10		55	
-100	2220 1020 970	100	4	6/10		85	
-150	2310 1250 1070	150	5	6/10		190	
-200	2355 1486 1070	200	6	6/10		340	




	<sup>3</sup> /	8000 - 180 000
	/ <sup>3</sup>	1000
50	%	99
		260
/		400-2000
( )	-	144-720

[www.ive-co.ru](http://www.ive-co.ru)

100%

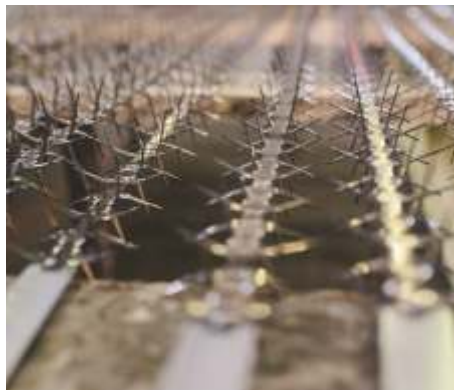

[www.ive-co.ru](http://www.ive-co.ru)

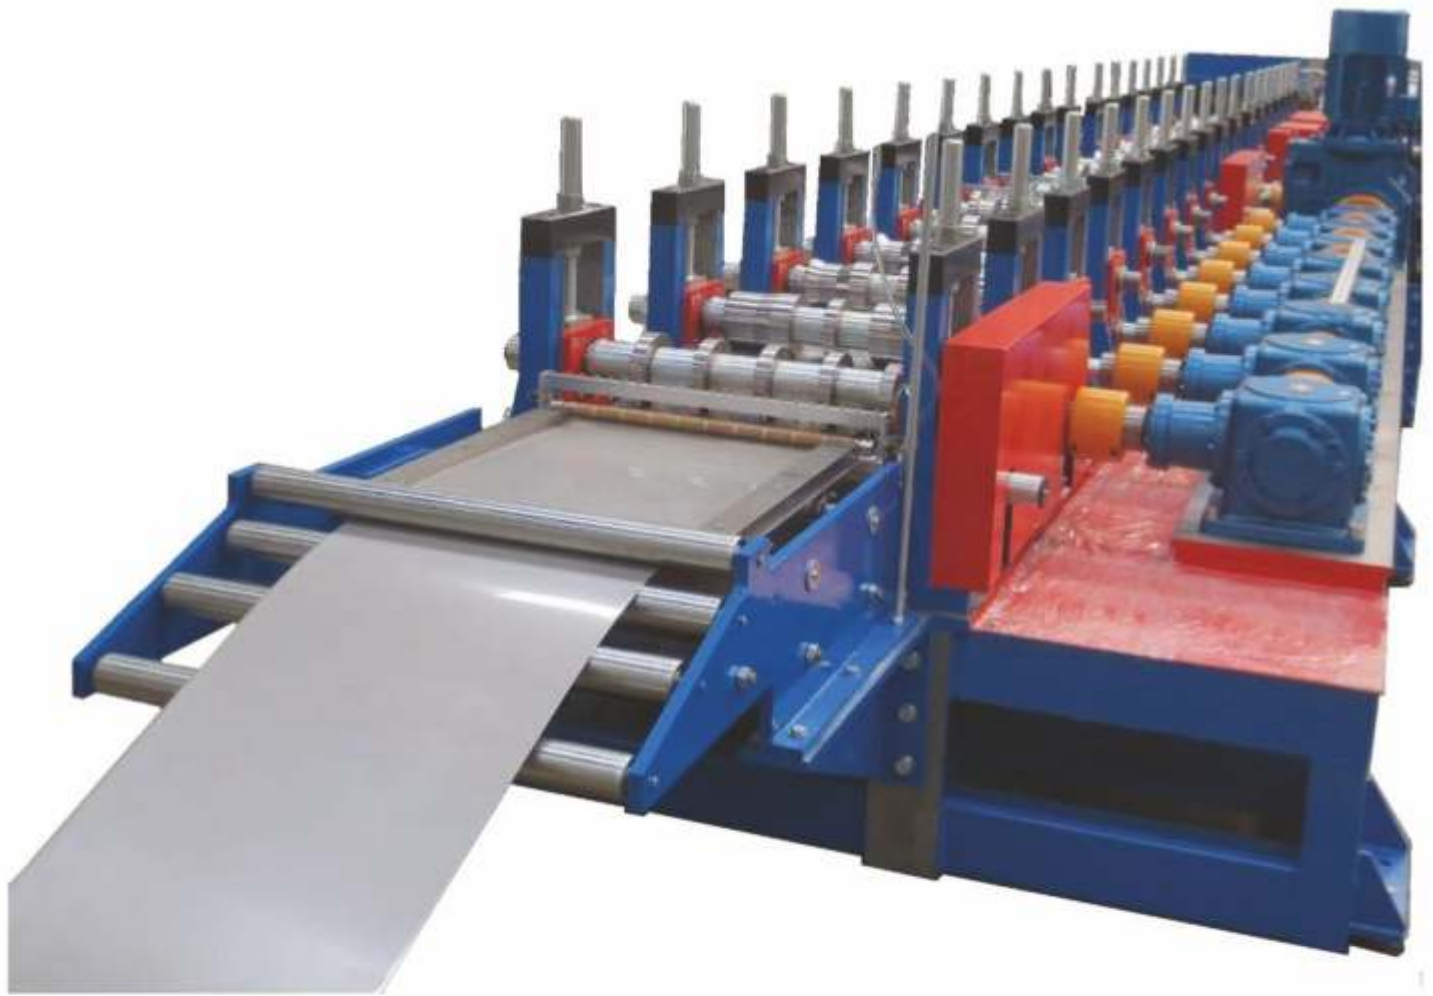

60 000

[www.ive-co.ru](http://www.ive-co.ru)

